



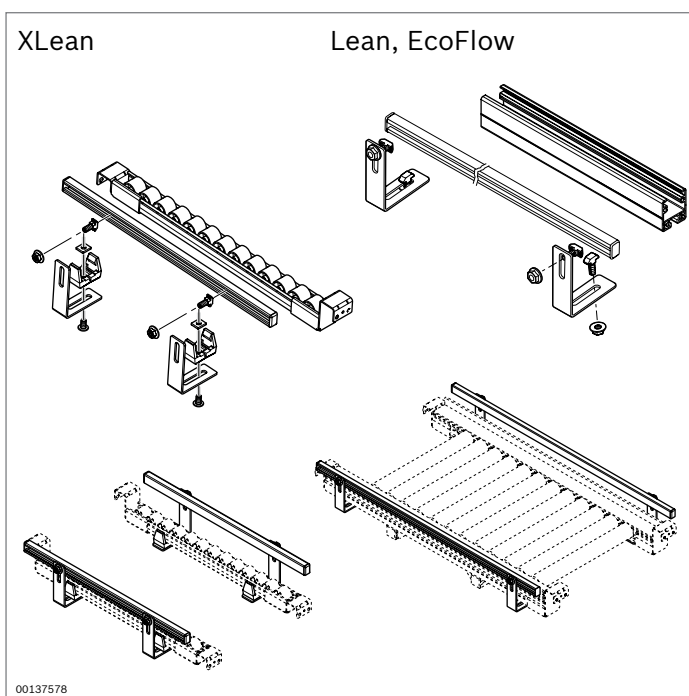


Lateral guide application

- For retrofitting a lateral guide to the XLean, Lean and EcoFlow conveyor tracks
- For assembly elements, see “Components” section (page 176)

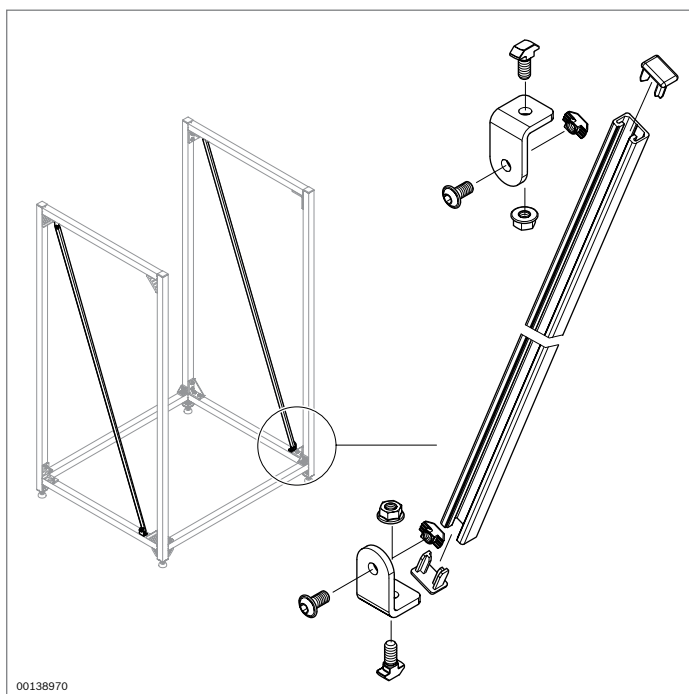

Reinforcement application









- For constructing flow racks with increased stability
- Rack loads up to 2000 kg
- For assembly elements, see “Components” section (page 176)

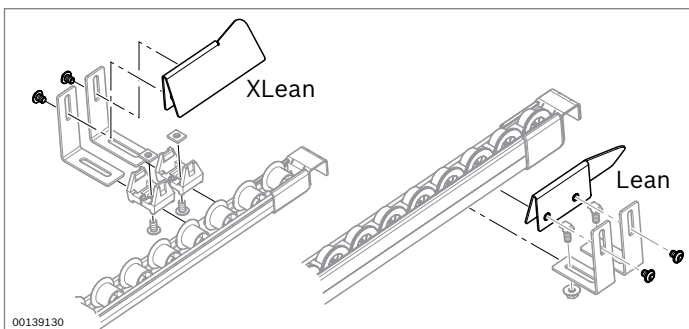

Insertion aid application

- Helps logisticians to insert material containers onto a conveyor track
- Quick and easy insertion
- For assembly elements, see “Components” section (page 176)

Reinforcement assembly element
 Lateral guide assembly element

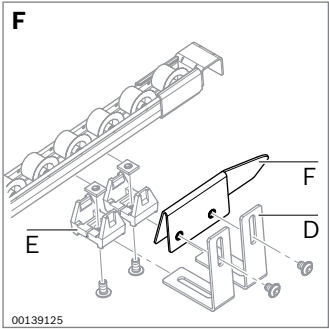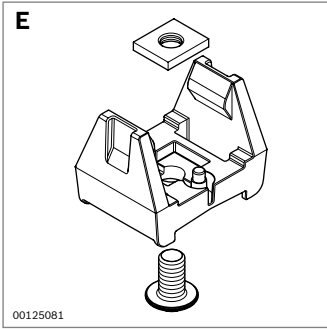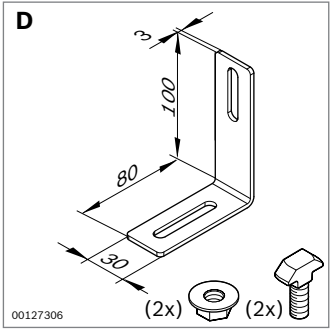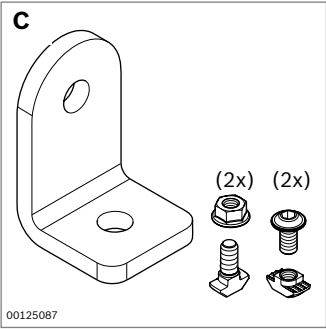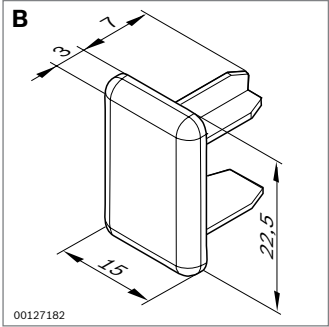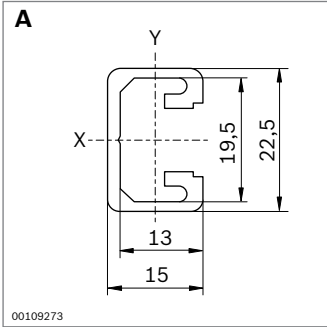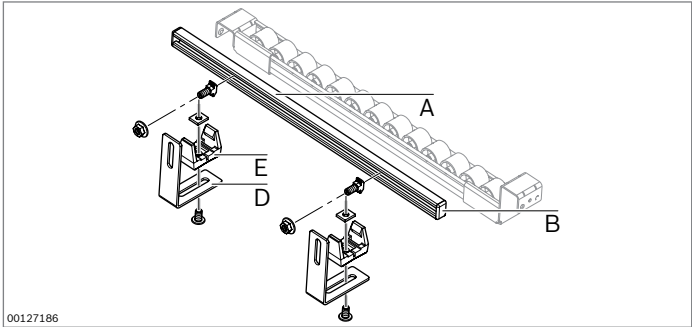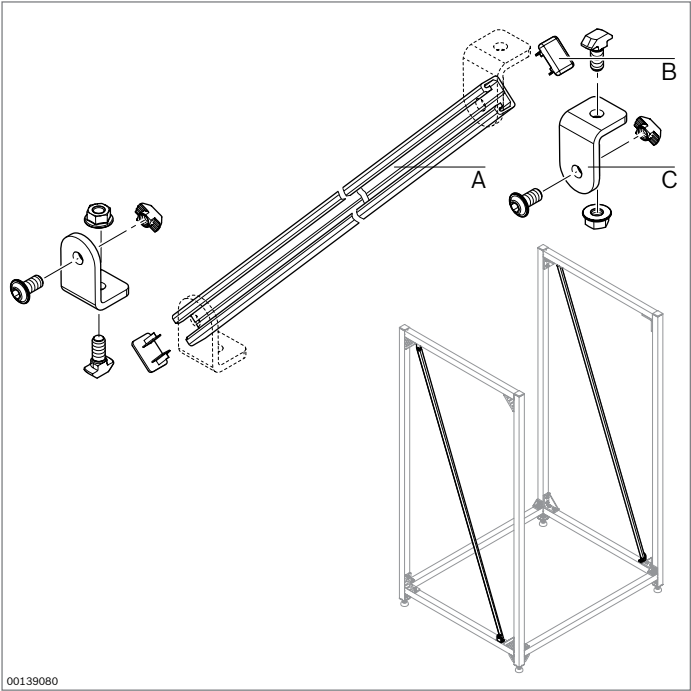

	L (mm)		ESD	No.
A 15x22.5 profile; material: aluminum; anodized	50 ... 3000	1		3 842 992 473/L
	2000	10		3 842 513 576
B 15x22.5 cap; material: PP; black 15x22.5 cap; material: PP, signal gray			20	3 842 548 817
			20	3 842 548 816
C Bracket set, incl. fastening material for 10 mm slot; material: steel; galvanized			20	3 842 536 729
D Bracket set, incl. fastening material for 10 mm slot; material: steel; galvanized			20	3 842 535 125
E Adapter for XLean conveyor track; material: PA			20	3 842 537 022
F Right and left guide plate, incl. fastening material			Set	3 842 538 981