


Steel-coated chain

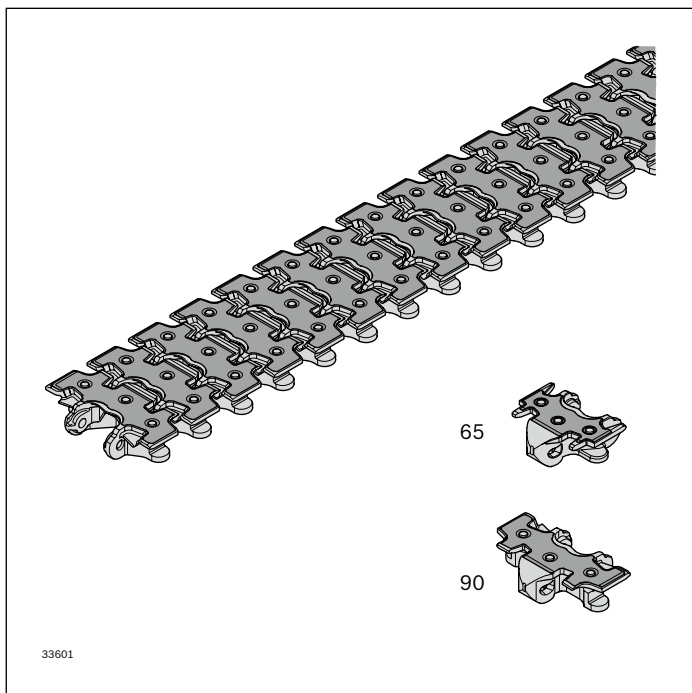

- ▶ The stainless version is also suitable for use in wet ambient conditions
- ▶ This chain version offers quieter running and less maintenance (no lubrication) compared with completely steel chains

Scope of delivery:

Chain: Complete, incl. chain pin and jointed bolts

Material:

- Chain link: POM, white
- Steel coating: Stainless steel 1.4301, HV \geq 480
- Chain pin: Stainless steel, 1.4301
- Jointed bolts: PA66

The steel-coated chain is used for sharp-edged parts and products with a rough surface.

- Transport on ascending or descending sections up to 7° possible, depending on the product (test required)
- Accumulation operation permitted, depending on the product
- Maximum chain tensile force: 1250 N
- Size: 65, 90
- Combination with chain links of different chain types is not permitted

Note: We recommend using steel slide rails (see page 58), as abrasive particles cause increased wear.


Note:


Not suitable for standard VarioFlow *plus* WT system.

- ▶ Extremely quiet chain running thanks to the patented chain design
- ▶ Materials meet the requirements of EU 10/2011 and FDA CFR 21


Condition on delivery:


Chain: Fully assembled

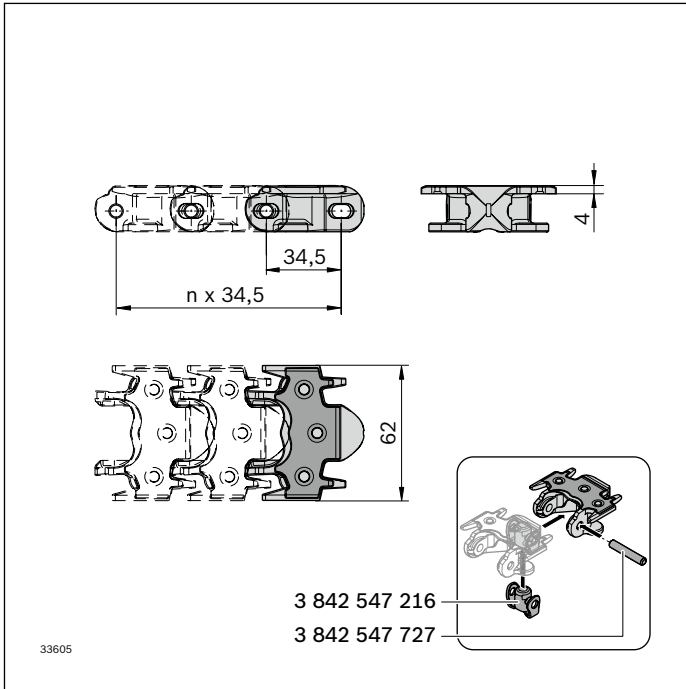

Steel-coated chain <i>VFplus 65</i>	L (mm)	 No.
	4968	1 3 842 546 090

2

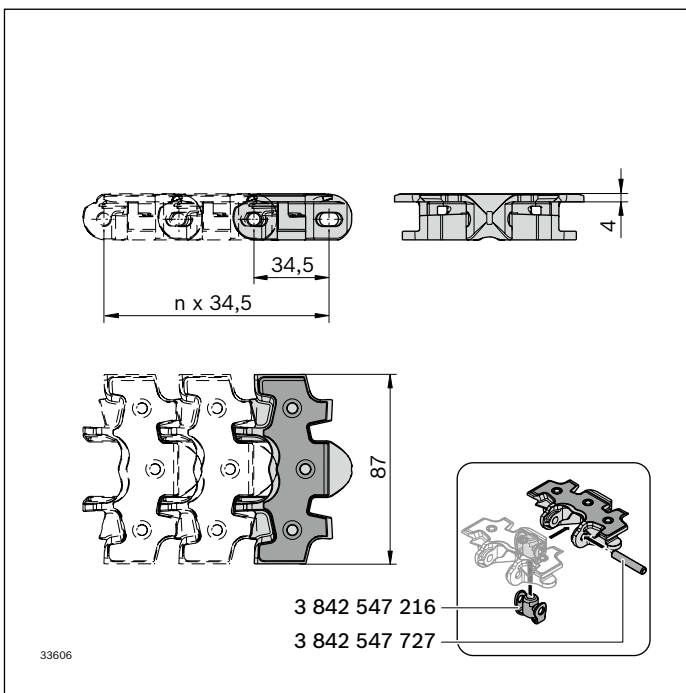

Steel-coated chain <i>VFplus 90</i>	L (mm)	 No.
	4968	1 3 842 546 091