










Aluminum cable duct

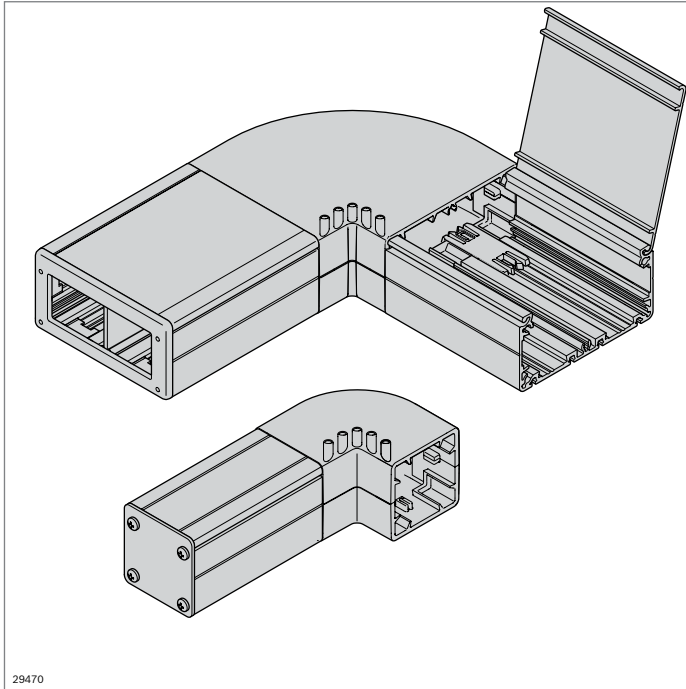

- ▶ Can be either clipped or screwed onto the support profile
- ▶ Sizes 40x40, 40x80, 80x40, 80x80
- ▶ Drilling aids for easy machining
- ▶ Dovetail attachment option
- ▶ Suitable for installing on profiles with modular dimensions of 40 and 45 mm
- ▶ Interior can be divided for routing different cable types (size 80x40 and 80x80)
- ▶ ESD-conductive
- ▶ High-quality, attractive external finish thanks to anodized duct surface and cover plate
- ▶ Edge protector for protecting the cables/lines from being damaged on rough edges
- ▶ PG screw fastenings possible in the side wall and cover plate (mechanical finishing)
- ▶ Fitting of sockets, switches etc. possible (mechanical finishing)
- ▶ Screw holes for secure fastening of the cover plate
- ▶ Cable duct cover can be screwed to the bearing/support structure
- ▶ VDE certified
- ▶ Compliant with DIN EN 50085-1 and 50085-2-1 standards

11

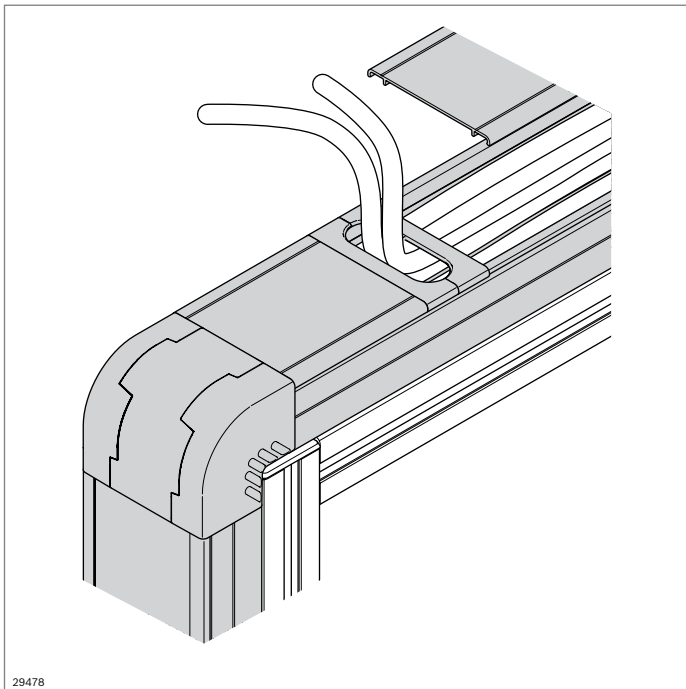



Aluminum cable duct

- Cable duct pre-assembled (cover and bearing/support structure)
- Usable length 3000 mm (delivered in 3100 mm lengths)
- Cover can be secured with a self-tapping screw

Optional accessories: self-tapping screw **3 842 552 267**

Cable duct with AL cover plate	ESD	L (mm)	No.
1 pcs 40x40		100 ... 3000	3 842 996 356/L
12 pcs 40x40		3000	3 842 552 268
1 pcs 40x80		100 ... 3000	3 842 996 357/L
12 pcs 40x80		3000	3 842 552 270
1 pcs 80x40		100 ... 3000	3 842 996 358/L
12 pcs 80x40		3000	3 842 552 273
1 pcs 80x80		100 ... 3000	3 842 996 359/L
6 pcs 80x80		3000	3 842 552 275

Material: aluminum, anodized

Self-tapping screw

- For securing the cover plate on the cable duct
- Produces conductive connection between the cover plate and cable duct

Self-tapping screw	ESD		No.
Ze. Pi. 3.5x9.5		10	3 842 552 267

Material: steel; galvanized