


EcoSafe protective frame

- ▶ Protective frame made of protective grille profile 30x30 WG40 (p. 10-7) with woven wire grille 40x40x4
- ▶ Suitable kits enable the construction of doors (system doors, sliding doors, double doors)
- ▶ Fully assembled on delivery
- ▶ Simple mounting on the supports using the suspension brackets. Single fitter is sufficient
- ▶ Standard widths or customized dimensions
- ▶ Horizontally or vertically divided protective frames provide additional stability for large surfaces
- ▶ Color-coated woven wire grilles improve visual contrast in the protected area and facilitate recognition of access routes and emergency exit routes
- ▶ Modular dimension “B” relates to 45x45 supports

Technical data (p. 19-11)

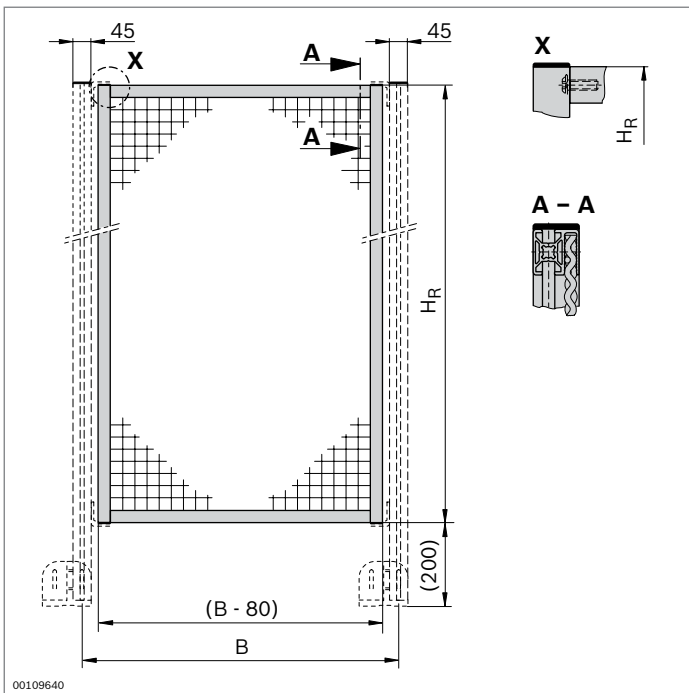

| Protective frame | H _R (mm) | B (mm) | No. |
|------------------|---------------------|------------|---|
| | 1800 | 500 | 3 842 554 282 |
| | | 750 | 3 842 554 283 |
| | | 1000 | 3 842 554 284 |
| | | 1500 | 3 842 554 285 |
| 250...2300 | | 250...1500 | 3 842 994 742 / H_R, B, FA |

Material: Frame: aluminum, anodized
Woven wire grille: steel, hot-galvanized

Color of woven wire grille: FA = 0: hot-galvanized
FA = 1: black; RAL 9005 (e.g. for fence)
FA = 2: yellow; RAL 1023 (e.g. for doors)